

Installation Instructions - GROTTO R1

SAFETY NOTES

- The electrical connection may be set up by suitably trained and qualified authorised personnel only.
- Never work when voltage is present on the luminaire. **WARNING - Risk of electric shock!!**
- **Attention! Do not touch the LEDs**, this avoids ESD damage.
- LED module **risk group one**; in case of malfunctions with the LED module, please contact Light Culture.

Important information regarding electronic control gear (ECG)

- Interference to the neutral conductor in a three-phase system may result in surge-related damage in the lighting installation. Only open neutral conductor-disconnect terminal when disconnected from power supply and close prior to switching back on.
- The maximum admissible ambient temperature t_a 25°C of the luminaire may not be exceeded. Surpassing that temperature reduces the service life and, in extreme cases, poses risk of early failure.
- Use mains cables for control inputs of dimmable ECG (1...10V, DALI, etc.) which are rated for 230V.




IMPORTANT!

For best results with the self-adhesive, please make sure the surfaces are cleaned with a detergent and perfectly dry.





INSTALLATION INSTRUCTIONS


1. Measure the required length

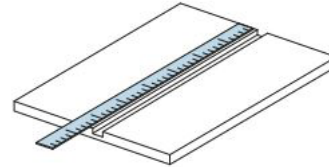


2. Route out space for Grotto profile
16.8mm x 9mm

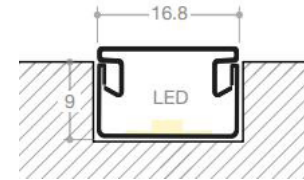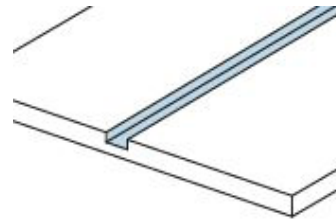


3. In case of interrupted milling, the specific milling-cover endcaps are necessary

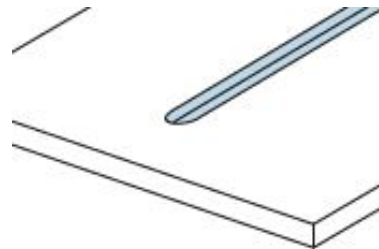


4. Insert the milling-cover endcaps

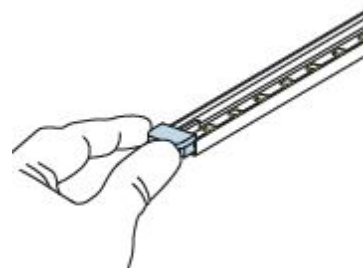

5. Pour glue into the milling channel

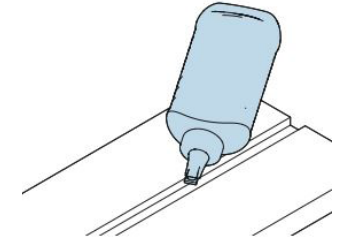

6. Stick the profiles onto the surface applying light pressure

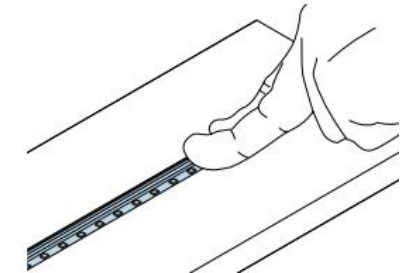

7. Clip the cover on.

